

# Compas

## Analog Addressable Fire Alarm Control Panels



### Standard Features

- UL Listed (Tenth Edition) and FM Approved
- Supports Hochiki and Apollo Protocols
- 2 to 8 loop or 2 to 16 loop versions
- 400mA loop current
- 4 programmable NACs; Class B or 2 Class A with internal synchronization
- 5.25 A or 10.25 A power supply options
- 3 programmable inputs and 5 programmable relay outputs
- 7 inch, full-color resistive touch screen with intuitive user interface
- Up to 24 programmable soft "function keys"
- Up to 64 user login accounts
- Hard-wired fire and trouble routing inputs and outputs
- Modular and expandable electronics
- 400 subaddress points per loop (800 per loop module)
- Option to "invert" inputs and outputs
- 5000 programmable cause and effects; over 50,000 inputs and outputs
- Can be networked with programmable functionality
- Programming via USB port to PC or memory stick



## Product Overview

The all new Compas product range of fire alarm control equipment combines the very latest hardware and software to produce a control and indication system, which is powerful and sophisticated, yet simple to use and understand. The flexibility of the Compas platform is such that it can be re-configured to realize many other control and indication applications, with direct integration into intelligent buildings.

Moving away from the simple, price driven competitive model used by most manufacturers today, the Compas concept is designed to add value to System Designers, Integrators, Service Providers, and end users. Developed from the "ground up" and using some of the most advanced technology available, Compas is designed as one of the most powerful, intelligent, and technically robust fire alarm products available.

Not only do the products and services offered under the Compas brand provide solutions to the most technically challenging applications in life safety, Compas will deliver added value, market advantage, and a competitive edge to your business.

## Optional Panel Peripherals

- **LatiView Graphics**  
L@tiView enables the creation of a 2D map of any site or building to monitor fire safety and detection, and automatically switches to an area where a fire device has been activated to allow immediate viewing and investigation of an event.
- **Dual Loop Panel Module (S758)**  
The Dual Loop Panel Module monitors loop device status and provides status to the panel processor. It holds device configurations and operates in a standalone manner when catastrophic failures occur.
- **16 Channel I/O Interface Card (S560)**  
The 16 Channel I/O Interface enhances the versatility of the alarm system by providing additional input and output capabilities to the Compas Fire Alarm Control Panel. Inputs or outputs can be selected for up to 16 individual channels, and are configured in the same way as devices connected to addressable loops of the panel. The 16 Channel I/O Interface can be configured to contribute or act upon cause and effect logic.
- **Media Gateway™ Panel Module (S788)**  
The Media Gateway Panel Module provides connectivity to monitoring centers using IP (Sur-Gard), or dial-up connectivity. The Media Gateway may also be used to meet integration application requirements.
- **8 Channel Relay Panel Module (S791)**  
The 8 Channel Relay Panel Module has 8 voltage-free changeover relay contacts, each of which can be individually programmed. All outputs are configurable in the same way as devices connected to the loops and all may be acted upon by cause and effect logic. These boards are typically used in applications which require more than the five standard relay outputs, such as signaling to other systems or plant control.
- **Network Module (S723)**  
The Network Module provides enhanced high-speed communication for networking fire control panels. The network provided by this module can support combinations of Fire Alarm Control Panels and Vision units. Fire Alarm Control Panels can receive events from other panels in the network. The Class X networking used in conjunction with the Network Module provides tolerance against open and short circuit trouble conditions.
- **Printer (S768)**  
The Printer is an optional feature for printing fire system events as they occur. The printer is located on the fascia, below the Zone LEDs (if present). It is a thermal printer and never requires replacement ink. Printing is performed on heat-sensitive paper rolls. A trouble message is reported when the paper runs out. The printer includes a front-loading feature for replacing paper rolls.
- **Zone LED Module (S771)**  
The Zone LED module contains 48 LEDs and is connected to the LCD Main Processor Board of the Compas Fire Alarm Control Panel. A maximum of three Zone LED modules can be connected to provide the fascia with 144 Zone LED indicators.
- **4 Channel NAC Panel Module (S793)**  
Additional NAC output capability can be added to by using 4 Channel NAC Modules. These boards have 4 supervised NAC outputs, each of which can be individually programmed. The circuits can be configured for class A or B operation. These circuits can be configured to act upon cause and effect logic.
- **8 Channel Conventional Zone Panel Module (S792)**  
The 8 Channel Conventional Zone Panel Module has 8 supervised detection circuits (Class B). Each circuit can support up to 20 conventional detectors and approved devices. Individual circuits may be configured for trigger resistor or short circuit activation. These circuits may be used for any of the standard input actions and can be configured to contribute to cause and effect logic. Each pair of circuits (e.g., 1 and 2, 3 and 4, etc.) can be joined to form a single Class A configuration.
- **16 Channel I/O Interface Panel Module (S772)**  
The 16 Channel I/O Interface Panel Module will provide the same functionality as the 16 Channel I/O Interface Card, with the convenience of a plug-in module.

## Technical Specifications





### 2 to 8 LOOP (4 SLOT) ENCLOSURE

|                                  |  |
|----------------------------------|--|
| Size                             | <b>Standard Cabinet</b> - 420mm (W) x 590mm (H) x 153mm (D), or 16.5in (W) x 23.2in (H) x 6in (D)<br><b>Deep Cabinet</b> - 420mm (W) x 590mm (H) x 203mm (D), or 16.5in (W) x 23.2in (H) x 8in (D)     |
| Construction                     | Mild sheet steel enclosure, 16 SWG   |
| Cable Entry                      | <b>Standard Cabinet</b> - 28 knockouts top, 19 knockouts back, 1 knockout each side, 2 knockouts bottom<br><b>Deep</b> - 38 knockouts top, 19 knockouts back, 1 knockout each side, 2 knockouts bottom |
| Optional Semi-Flush Mounting Kit | Semi-Flush Mounting Collar Kit<br>KM5FCRD - Red<br>KM5FCGY - Gray<br>KM5FCBS - Black   |
| Battery Capacity                 | <b>Standard Cabinet</b> - Up to 28 Ah (Power Sonic PS-12280)<br><b>Deep Cabinet</b> - Up to 40 Ah (Power Sonic PS-12400)   |


### 2 to 16 LOOP (8 SLOT) ENCLOSURE

|                  |  |
|------------------|--|
| Size             | <b>Standard Cabinet</b> - 540mm (W) x 720mm (H) x 160mm (D), or 21.3in (W) x 28.3in (H) x 6.3in (D)<br><b>Deep Cabinet</b> - 540mm (W) x 720mm (H) x 212mm (D), or 21.3in (W) x 28.3in (H) x 8.3in (D)           |
| Construction     | Mild sheet steel enclosure, 16 SWG   |
| Cable Entry      | <b>Standard Cabinet</b> - 38 knockouts top, 25 knockouts back, 2 knockouts each side, 2 knockouts bottom<br><b>Deep Cabinet</b> - 50 knockouts top, 25 knockouts back, 2 knockouts each side, 2 knockouts bottom |
| Battery Capacity | <b>Standard Cabinet</b> - Up to 28 Ah (Power Sonic PS-12280)<br><b>Deep Cabinet</b> - Up to 40 Ah (Power Sonic PS-12400)   |

### ALL MODELS

|                                |   |
|--------------------------------|---|
| Finish                         | Epoxy powder coated   |
| Color                          | Enclosure<br> Red (RAL3002)<br> Gray (BS 00 A 05)<br> Black (RAL9005)<br><br>Fascia<br> Pantone 532 C |
| Power supply voltage           | 115 V AC or 230 V AC  |
| Power supply rating at 24V DC  | 5.25 A (charges up to 60 Ah)<br>10.25 A (charges up to 100 Ah)  |
| Display                        | Full-color 800 x 480 LCD with resistive touch screen and automatic backlight dimming  |
| Software zones                 | 2000  |
| Software groups                | 5000  |
| Cause and Effects              | 5000  |
| Event log                      | 10,000 events, 1 second resolution. Filterable and printable.   |
| Detection loops                | 2 to 16 added 2 at a time (S758 dual loop cards)  |
| Detection loop current         | 400 mA each   |
| AUX 24V Output                 | 2; each rated at 900 mA   |
| NACs                           | 4; each rated at 2.5 A. Class B or 2 Class A.   |
| Programmable Relay Outputs     | 5; 30 V DC 1 Amp  |
| Programmable Inputs            | 3; designed to be activated by voltage-free contacts  |
| Network Connection             | Optional network card provides communication for networking 127 fire control panels   |
| NAC Synchronization            | Internal Support of System Sensor, Wheelock, Gentex, and Amseco protocols   |
| Printer (OPTIONAL)             | 40 column, front-loading thermal  |
| Zone LED Indicators (OPTIONAL) | Up to 3 banks of 48 (144) as standard   |
| Operating Temperature          | 23° F to 120° F ( -5° C to 49° C)   |
| Operating Humidity             | to 95% (non condensing)   |

## Panel Model Numbers

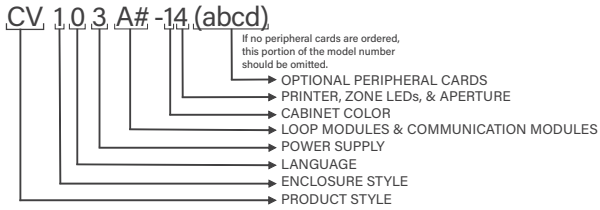

| Panel Options                        | Valid Entries  | Description   |
|--------------------------------------|--|---|
| Product Style                        | CV   | Compas Fire Alarm Control Panel   |
|                                      | CR   | Compas Network Vision Annunciator                                       |
| Enclosure Style                      | 1  | 4 Slot Standard Enclosure   |
|                                      | 2  | 4 Slot Standard Plex-Door Enclosure                                     |
|                                      | 3  | 4 Slot Deep Enclosure   |
|                                      | 4  | 4 Slot Deep Plex-Door Enclosure   |
|                                      | 5  | 4 Slot Extra Deep Guard Station Enclosure - FUTURE ENHANCEMENT          |
|                                      | 6  | 4 Slot 19" Rack Mount Enclosure   |
|                                      | 7  | 8 Slot Standard Enclosure - 16 Loop                                     |
|                                      | 8  | 8 Slot Standard Plex-Door Enclosure - 16 Loop                           |
|                                      | 9  | 8 Slot Deep Enclosure - 16 Loop   |
|                                      | A  | 8 Slot Deep Plex-Door Enclosure - 16 Loop                               |
|                                      | C  | Annunciator   |
| Language                             | 0  | English   |
|                                      | 1  | Portuguese  |
|                                      | 2  | Spanish   |
|                                      | 3  | Taiwanese   |
| Power Supply                         | 0  | None  |
|                                      | 1  | 5.25 A 115V   |
|                                      | 2  | 5.25 A 230V   |
|                                      | 3  | 10.25 A (auto-voltage sensing)  |
| Loop Modules & Communication Modules | 00   | Not Fitted  |
|                                      | NC   | Network Module only (Network Vision Annunciator)                        |
|                                      | A#   | 2-Loop Panel Module, Apollo and/or Hochiki Protocol                     |
|                                      | L#   | 2-Loop Panel Module, Apollo and/or Hochiki Protocol, and Media Gateway  |
|                                      | M#   | 2-Loop Panel Module, Apollo and/or Hochiki Protocol, and Network Module |
| N#                                   | 2-Loop Panel Module, Apollo and/or Hochiki Protocol, Network Module, and Media Gateway |   |
| Cabinet Color                        | 1  | ● Red (RAL3002)   |
|                                      | 4  | ● Gray (BS 00 A 05)   |
|                                      | 6  | ● Black (RAL9005)   |
| Printer, Zone LEDs & Aperture        | 0  | No Printer / No Zone LEDs   |
|                                      | 1  | No Printer / No Zone LEDs, Blank 2nd Aperture                           |
|                                      | 3  | Printer / No Zone LEDs  |
|                                      | 4  | Printer / 48 Zone LEDs  |
|                                      | 5  | No Printer / 48 Zone LEDs   |
|                                      | 6  | No Printer / 96 Zone LEDs   |
|                                      | 7  | No Printer / 144 Zone LEDs  |
| Optional Peripheral Cards            | a  | 16 Channel I/O Panel Module (S772)                                      |
|                                      | b  | 8 Channel Relay Panel Module (S791)                                     |
|                                      | c  | 8 Channel Conventional Zone Module (S792)                               |
|                                      | d  | 4 Channel NAC Module (S793)   |